




DIMENSIONI - DIMENSIONS

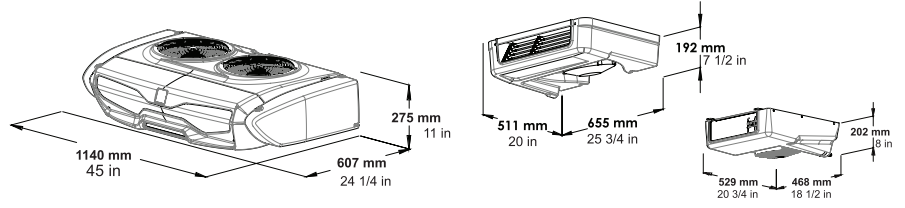

TECHNICAL DATA

Operation	Strada • Road		Rete • Stand-by				
Refrigerant	R404A						
Gas charge	1,55 Kg - 3.40 lbs						
Cooling capacity *Ta = 30 °C			+ 4°C Evap	3.100 W - 10600 Btu/hre		+ 4°C Evap	2.000 W - 6800 Btu/hre
			- 20°C Evap	2.900 W - 9900 Btu/hre		- 20°C Evap	1.900 W - 6500 Btu/hre
			+ 4°C Evap	2.000 W - 6800 Btu/hre		+ 4°C Evap	950 W - 3250 Btu/hre
			- 20°C Evap	1.600 W - 5500 Btu/hre		- 20°C Evap	800 W - 2750 Btu/hre
Rated current consumption			12 Vdc				34 A / 0,4 kW
Electric motor			230/1N~/60				14 A / 3 kW
Defrost			Hot Gas				
Condensing unit weight			90 Kg - 198 lbs				
			60 Kg - 132 lbs				
Evaporator weight			+ 4°C Evap 9 Kg - 20 lbs + - 20°C Evap 14 Kg - 30 lbs				
			147 cc				
Compressor			87 cc				
Evap air flow		+ 4°C Evap	800 m³/h - 470 cfm				
		- 20°C Evap	1000 m³/h - 590 cfm				
Air throw		+ 4°C Evap	4 m - 13 ft				
		- 20°C Evap	3.5 m - 12 ft				

RECOMMENDED TRUCK BODY VOLUME

Evap	+4° C Evap		-20 °C Evap	
	+30 °C	+40 °C	+30 °C	+40 °C
Vol.	23 m³ - 820 ft³	17 m³ - 600 ft³	15 m³ - 530 ft³	12 m³ - 420 ft³

LEGEND			
Tc	cold room temperature		road operation
Ta	ambient temperature		stand-by operation
Vol.	volume		

STANDARD FEATURES

- IN-CAB CONTROLLER
- UNIT AND CONDENSATION DRAIN INSTALLATION KIT
- VEHICLE BATTERY ELECTRIC CONNECTION KIT
- REFRIGERATOR CONNECTION KIT COMPLETE WITH FITTINGS AND PIPES OF SUITABLE LENGHT

- ELECTRICAL POWER CONNECTION KIT WITH 10 MT CABLE, PLUG AND SOCKET
- SUITABLE FOR WALL OR ROOF MOUNTING
- CARTON PALLET PACKAGING
- LIQUID INJECTION

OPTIONS

- COMPRESSOR MOUNTING KIT
- DIFFERENT VOLTAGE ON REQUEST
- HOT WATER HEAT

XTC
Xperts in Transportation Climate Control
"Environmentally Friendly Solutions"

TEL : 905-362-2112 FAX : 905-362-2115
6198 Netherhart Road, Unit 2 Mississauga, ON. L5T 2G7
www.xtcc.ca